TACENS Gelus

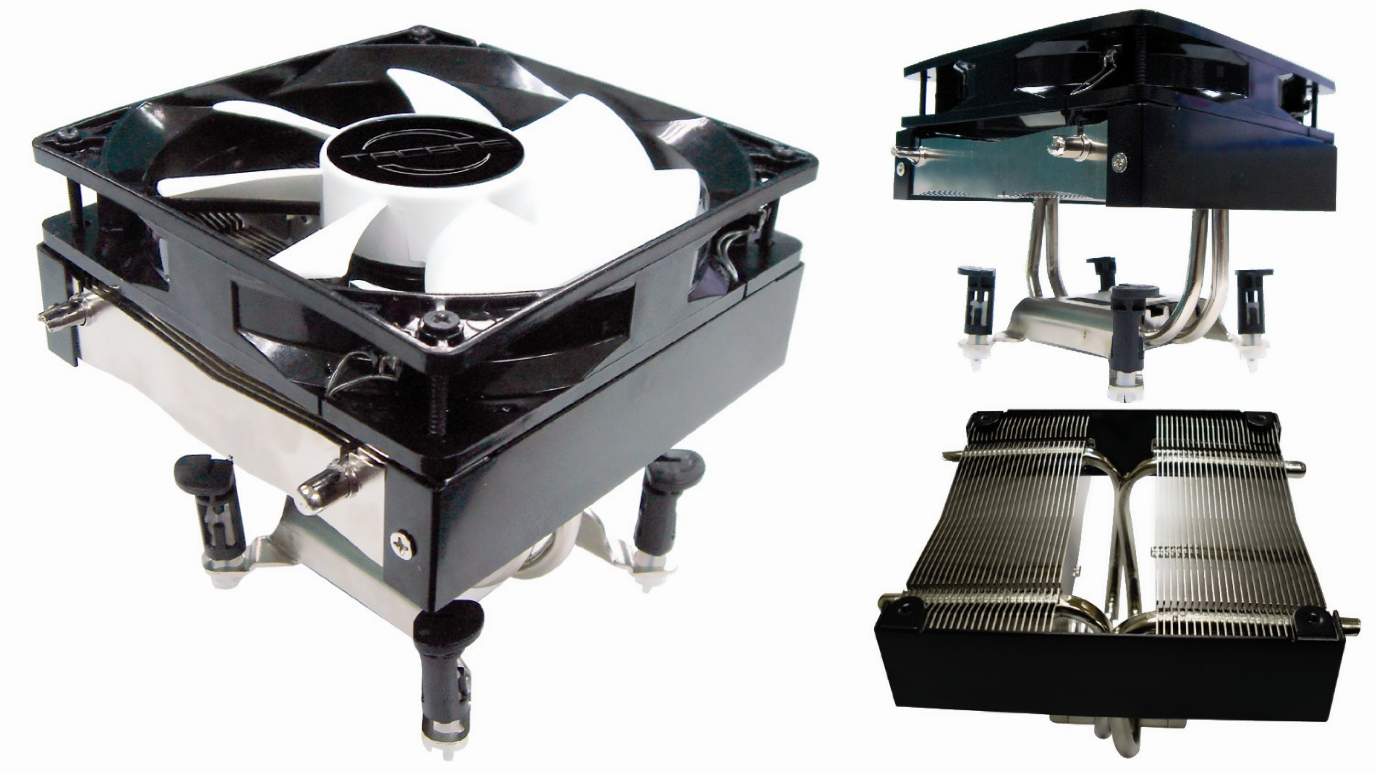

9 dB
12cm FAN

- **TACENS AURA FAN WITH FLUXUS BEARING WITH ANTIVIBRATION PADS**
- **MANUAL SPEED CONTROL ON PCI FOR TOTAL USER FAN CONTROL**
- **POWERFUL SUPERCONDUCTOR HEATPIPE TECHNOLOGY**
- **NICKEL PLATED COPPER BASE AND HEATPIPES AND ALUMINIUM FINS**
- **ULTRA LOW WEIGHT**
- **FAST AND EASY INSTALLATION**

HEATSINK SPECIFICATIONS	
DIMENSIONS (mm)	118(L) x 46(W) x 22(H) / MODULE (TOTAL 2 MODULES)
WEIGHT	325g
MATERIAL	COPPER BASE AND SUPERCONDUCTOR HEATPIPES NICKEL PLATED + ALUMINIUM FINS
SOCKET TYPE	INTEL LGA 775, AMD 754,930 & 940 AND AMD AM2
FAN SPECIFICATIONS	
DIMENSIONS (mm)	120 x 120 x 25 mm
WEIGHT	125g (170g WITH PCI FAN CONTROL)
FAN SPEED	800 – 1500 R.P.M.
FAN AIRFLOW	28.5 – 52.25 CFM
LIFE EXPECTANCY	MORE THAN 50000 hrs
BEARING	TACENS FLUXUS BEARING
VOLTAGE RATING	12V
NOISE LEVEL	9 – 16 dB

INTEL LGA775
AMD K8
(754, 939 & 940)
AMD AM2
COMPATIBLE

NEW TACENS FLUXUS BEARING

ULTRA SILENT

LOWER NOISE THAN SLEEVE OR BALL BEARINGS

DUST PROOF DESIGN

CLOSED CONSTRUCTION PREVENT THE DUST AND FOREIGN BODY INTO DE BEARING

LONG LIFE

MORE THAN 50000 hrs

LOW WORKING TEMPERATURE

THE FAN WORKS PERFECTLY IN VERY HOT CONDITIONS

ENVIRONMENTALY FRIENDLY

WWW.TACENS.COM